


## Wall Receptacle Module, Model SR227

The Wall Receptacle Module is designed to control unrestricted loads up to 15 Amps. It has two outlets, the upper one is X10 controlled and the lower one is always on. The Wall Receptacle Module does not respond to All Lights On.

### Installation

- Turn the power off at the circuit breaker panel.
- Remove the existing wall plate and unscrew the receptacle from its box.
- Disconnect the wiring to the existing receptacle.
- Connect the black wire on the Wall Receptacle Module to Live (black wire), connect the white wire on the Wall Receptacle Module to Neutral (white wire), and connect the green wire on the Wall Receptacle Module to ground (or to a metal wall box) using the wire nuts provided. Refer to the diagram above.
- Refit the Wall Receptacle Module in the wall box and finish off with the trim plate provided. Turn the power back on at the circuit breaker panel.

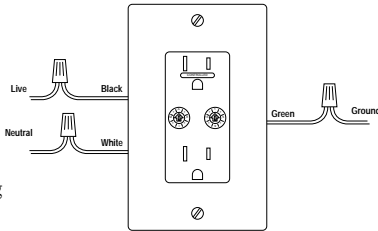

### Setting up the Wall Receptacle Module

- Using a small screwdriver, set the Unit Code dial to an unused code that can be controlled from your X10 Controller(s).
- Set the House Code dial to the same letter as your X10 controller(s).
- Plug an appliance (or a lamp) into the **top** outlet.

### Testing the Wall Receptacle Module

Make sure the appliance's switch is on. Plug an X10 Controller into the **bottom** outlet. Press the On and Off buttons on the Controller that correspond to the Unit Code setting on the Wall Receptacle Module. If the appliance turns on and off you can unplug the Controller and move it to its permanent location. If you can't control the Wall Receptacle Module with the Controller in another location, try several locations, or visit <http://www.x10.com/support> for help.

Check Out our Web site at:

<http://www.x10.com>

For more information on X10 products and special promotional offers.

### X10 Wireless Technology, Inc. Limited One Year Warranty

X10.com, a division of X10 Wireless Technology, Inc. (X10) warrants X10 products to be free from defective material and workmanship for a period of one (1) year from the original date of purchase at retail. X10 agrees to repair or replace, at its sole discretion, a defective X10 product if returned to X10 within the warranty period and with proof of purchase. If service is required under this warranty:

Call 1-800-442-5065, visit [www.x10.com](http://www.x10.com), or e-mail [support@x10.com](mailto:support@x10.com).

For help or more information on setup, please visit:

<http://www.x10.com/support>